



GX LINE

Innesti Rapidi in Acciaio Inox 316L
316L Stainless Steel Couplings
Coupleurs en Acier Inox 316L
Kupplungen aus Edelstahl 1.4404

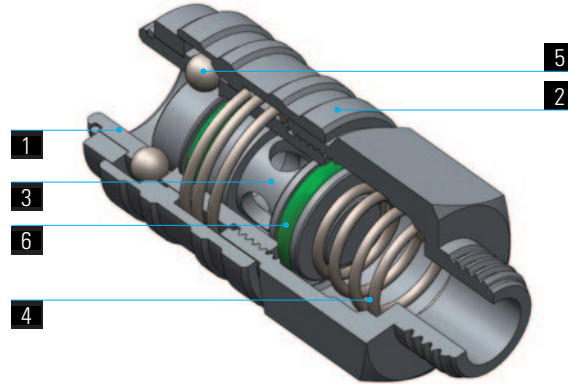

1	2	3	4	5	6	
Corpo Body Corps Körper	Ghiera di comando Command Sleeve Douille de commande Absperrhülse	Otturatore Valve Clapet Ventil	Molle Springs Ressorts Feder	Sfere Balls Billes Kugel	Guarnizioni Seals Joint d'étanchéité Dichtung	Innesti Plugs Embouts Stecker
Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)			Acciaio Inox AISI 302 Stainless Steel AISI 302 Acier Inox AISI 302 Edelstahl AISI 302	Acciaio Inox AISI 420 Stainless Steel AISI 420 Acier Inox AISI 420 Edelstahl AISI 420	FPM FPM FPM FPM	Acciaio Inox AISI 316L (1.4404) Stainless Steel AISI 316L (1.4404) Acier Inox AISI 316L (1.4404) Edelstahl AISI 316L (1.4404)

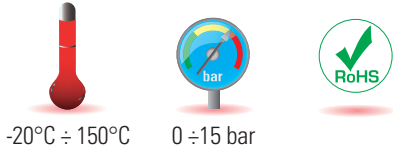

Intercambiabilità con i profili
Suitable with following plugs profiles
Interchangeable avec les suivants profils
Austauschbar mit folgenden Profilen

Portata
Flow rate
Débit
Durchfluß
(6 bar - Δp = 1 bar)

	Profilo Europeo European Profile Profil européen Europäisches Profil	820
	Profilo ISO 6150 B ISO 6150 B Profile Profil ISO 6150 B ISO 6150 B Profil	715
	Profilo Svedese Standard Swedisch Profile Profil Standard Suédois Standard schwedisches Profil	725
	Profilo Italiano Standard Italian Profile Profil Standard Italien Standard Italienisches Profil	670
	Profilo MIL C4109 MIL C4109 Profile Profil MIL C4109 MIL C4109 Profil	715
	Profilo ARO 210 ARO 210 Profile Profil ARO 210 ARO 210 Profil	705


Scala 1:1 - Scale 1:1 - Echelle 1:1 - Maßstab 1:1

GX 10-11

Innesto rapido con filetto maschio Male couplig

Coupleur mâle

Einschraubkupplung

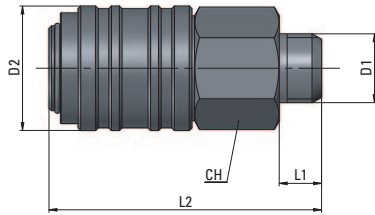


Tipo	D1	D2	L1	L2	CH	9
11 00 14	G1/4	23,5	10	52	21	87,8
11 00 38	G3/8	23,5	11	52	21	91,8

GX 10-12

Innesto rapido con filetto femmina Female couplig

Coupleur femelle

Aufschraubkupplung

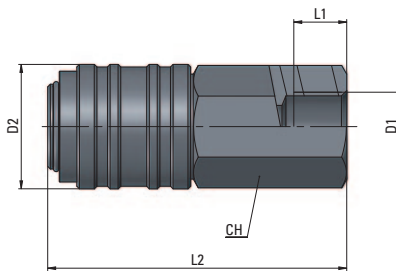

Tipo	D1	D2	L1	L2	CH	9
12 00 14	G1/4	23,5	10	57	21	110,9
12 00 38	G3/8	23,5	11	58	21	106,3


GX 10-20

Innesto con filetto maschio, profilo europeo

Male plug according to european profile

Embout mâle selon profil européen

Stecker gemäss europäisches Profil, Einschraub



Tipo	D1	L1	CH	9
20 00 14	G1/4	33	17	20,5
20 00 38	G3/8	34	21	30,4


GX 10-21

Innesto con filetto femmina, profilo europeo

Female plug according to european profile

Embout femelle selon profil européen

Stecker gemäss europäisches Profil, Aufschraub

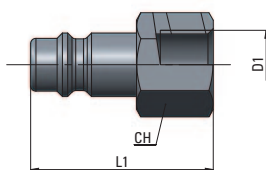

Tipo	D1	L1	CH	9
21 00 14	G1/4	33	17	23,6
21 00 38	G3/8	33	21	31,7
21 00 12	G1/2	45	25	-